

# An Investigation of the Dielectric and Thermal Properties of Frozen Foods over a Temperature From -18 to 80°C

Waraporn Klinbun & Phadungsak Rattanadecho

To cite this article: Waraporn Klinbun & Phadungsak Rattanadecho (2016): An Investigation of the Dielectric and Thermal Properties of Frozen Foods over a Temperature From -18 to 80°C, International Journal of Food Properties, DOI: [10.1080/10942912.2016.1166129](https://doi.org/10.1080/10942912.2016.1166129)

To link to this article: <http://dx.doi.org/10.1080/10942912.2016.1166129>



Accepted author version posted online: 31 Mar 2016.  
Published online: 31 Mar 2016.



Submit your article to this journal [↗](#)



Article views: 12



View related articles [↗](#)



View Crossmark data [↗](#)

# An Investigation of the Dielectric and Thermal Properties of Frozen Foods over a Temperature From -18 to 80°C

Waraporn Klinbun<sup>1\*</sup> and Phadungsak Rattanadecho<sup>2</sup>

<sup>1</sup> Department of Automotive Manufacturing Engineering, Faculty of Engineering and Technology, Panyapiwat Institute of Management, 85/1 Moo 2, Chaengwattana Road, Bang-Talad, Pakkred, Nonthaburi, 11120 Thailand

<sup>2</sup> Department of Mechanical Engineering, Faculty of Engineering, Thammasat University (Ransit Campus), 99 Moo 18, Phahonyothin Road, Khlong Nueng, Khlong Luang, Pathum Thani 12120, Thailand

\*warapornkli@pim.ac.th

## Abstract

The dielectric properties (dielectric constant ( $\epsilon'$ ) and dielectric loss factor ( $\epsilon''$ )) for three frozen meals (basil fried chicken, green curry with chicken, and congee with minced pork) were measured at frequency 2.45 GHz from -18 to 80°C. Thermal properties (thermal conductivity ( $k$ ) and specific heat capacity ( $c$ )) of each food item were characterized using their composition for improving the modeling of microwave thawing process of frozen products. For all frozen meals, similar trends in the dielectric and thermal properties values were observed as a function of temperature. In all samples of frozen foods, the dielectric properties ( $\epsilon'$ ,  $\epsilon''$ ) rapidly increased with temperature for the range from -10 to 0°C. Thereafter, dielectric properties linearly increased with temperature for basil fried chicken and congee with minced pork but linearly decreased with temperature for green curry with chicken from 0 to 80°C. The dielectric properties data bases were used to calculate power reflected ( $P_r$ ), power transmitted ( $P_t$ ),

dielectric loss tangent ( $\tan\delta$ ) and penetration depth ( $d_p$ ). These parameters were related to the dielectric properties. The thermal conductivity values of all samples decreased with increasing temperature in the frozen stage and little changed after thawing. While the specific heat capacity values increased first and then do not change considerably. The temperature-dependent material properties can give insight into how the food product interacts with the incident electromagnetic radiation.

*Keywords:* Dielectric properties; microwave; penetration depth; frozen food; thermal properties

## Introduction

Nowadays, consumption behavior is changing. They are spending less time for preparing meals and are looking for quick way to prepare meals that still taste good and provide adequate nutrition [1] The frozen food offers consumers immense convenience and comfort . The frozen food is a food that has been prepared or cooked then packaged and rapidly freezing. It is normally kept at  $-18^{\circ}\text{C}$  for preservation. The frozen food market in Thailand is forecast to grow at an average of 10% from 2012 to 2016 [2] In addition, a highly popular food for Thai people is cooked to order meals such as basil fried chicken, fried rice, green curry, phat Thai with fresh shrimp, congee, etc [3] The frozen foods need to be thawed before using them. The easy and convenient way to thaw these foods is put in microwave oven.

Microwave heating is preferred for thawing processing over the conventional heating for the basic reason that the process is fast and require minimum come-up time to the desired process temperature. Among its important advantages, microwaves penetrate and produce heat deep

within food materials (volumetric heating) that lead to fast accelerating rate, improved bacterial control and low costs. However, the non-uniform distribution of the electromagnetic field in the microwave cavity is a limitation for microwave applications in practice. The engineering design of microwave heating process needed to know the information about dielectric and thermal properties of selected foods.

Dielectric properties of food are important factors in microwave and radio frequency heating because these properties measure the interaction of the food with electromagnetic field. Dielectric properties are normally described by complex permittivity,  $\epsilon^*$  ( $\epsilon^* = \epsilon' - j\epsilon''$ ) where  $j = \sqrt{-1}$ . From the above equation,  $\epsilon'$  is real part which referred to dielectric constant, describes material's ability to store electric energy in an alternating field.  $\epsilon''$  is imaginary part which referred to dielectric loss factor, determines the property of the material to convert electric energy to thermal energy.

Various factors influence the dielectric properties of food materials such as frequency, ionic nature, moisture content, temperature, concentration, nature and constituents of food materials [4]. The rate of change of dielectric constant and dielectric loss factor with temperature depends on the free and bound water content of the food materials [5].

Thermal properties, including thermal conductivity and specific heat capacity, are also important input parameters for a heat transfer model. During heating and standing time, the thermal conductivity will influence the diffusion of thermal energy from hot spots to cold spots [6]. While in microwave heating process, the specific heat capacity of material influences the heating

rate. Especially, for frozen food, the latent heat associated with phase change will greatly influence the thawing process [7] .

Many previous studies determine the dielectric and thermal properties of food materials in RF and microwave frequency ranges such as fruits and vegetables [8-10], chicken breast muscle [11], pork muscle [12], salmon fillets [13], macaroni and cheese dinner preparation, ground whole-wheat flour, and apple juice [14,15], grape juice and wine [16], egg whites and whole eggs [17], whey protein gel [18], meat [19,20] However, there is lack of information studies on dielectric and thermal properties of composite food at 2.45 GHz over frozen temperature range to thawed state. Knowledge of dielectric and thermal properties is important to the research of RF and microwave heating in applications for thawing of frozen products.

The objectives of this study were: (1) to determine temperature-dependent dielectric properties using a portable dielectric measurement (Network Analyzer) at frequency of 2.45 GHz, (2) to calculate total power transmitted, power reflected, and penetration depth from dielectric properties measurements, (3) to derive predictive equations that relates dielectric properties of three Thai foods to temperature, and (4) to quantify thermal properties of three Thai frozen meals (basil fried chicken, green curry with chicken, and congee with minced pork).

# Materials and methods

## Samples preparation

Basil fried chicken was made from the composition of 40% chicken sliced, 55.8% of seasoning (soup stock powder, cooking oil, soy sauce, fish sauce, sugar), and 4.2% of vegetable (red chili, Holy basil, kaffir lime leaves) by weight basis. Green curry with chicken was made from the composition of 18.01% chicken sliced, 70.08% of seasoning (green curry paste, coconut milk, chicken soup stock powder, sugar, fish sauce), and 11.91% of vegetable (eggplants, red chili, Holy basil, kaffir lime leaves) by weight basis. Congee with minced pork was made from the composition of 85.20% congee, 12.30% of minced pork, and 2.5% of vegetable (dried Chinese mushroom, ginger, spring onion) by weight basis. All samples were packed into microwaveable plastic container and stored at  $-18^{\circ}\text{C}$  in a freezer until used for measurement of dielectric properties.

## Dielectric properties measurement

The portable dielectric measurement kit (Püschner GmbH+Co.KG, France) was used to measure dielectric properties of frozen food. The portable dielectric measurement kit allows for measurements of the complex permittivity over a wide range of solid, semi-solid, granular and liquid materials. The dielectric properties measurement system consisted of control functions, treatment of the microwave signals, calculation, data processing, and results representation, as shown in figure 1. The software controls the microwave reflectometer to measure the complex

reflection coefficient of the material under test (MUT). Then it detects the cavity resonant frequency and quality factor and converts the information into the complex permittivity of the MUT. Finally, the measurement results are displayed in a variety of graphical formats, or saved to disk. The precision is not more than 2% of the dielectric constant and 5% of the dielectric loss factor.

The instrument was warmed up for at least 30 min before the calibration and measurements were made. Calibration of the probe was done using air and water at 25°C. The sample was placed in a wide glass tube and the open coaxial probe was set into the tube. The sample holder was dipped into a temperature controlled water bath. The surface and internal temperature of the samples was monitor by using an infrared thermometer (Testo 845, German) and the thermocouple temperature sensor (Fluke 51 II, USA), respectively. The sample was heated from -18 to 80°C and the dielectric properties were measured while samples were at the desire temperature of -18, -10, 0, 10, 20, 30, 40, 50, 60, 70 and 80°C. The experiments were repeated three times. The results are reported at frozen and unfrozen stages as a function of temperature and at 2.45 GHz. The typical error of the dielectric properties measurements was about 5% following standard calibration procedures.

## **Analysis of thermal properties**

In this study, the thermal properties (thermal conductivity and specific heat capacity) were calculated using mathematical models. The steps are following: (1) to send all samples to SGS (Thailand) Limited Laboratory Services for measuring their nutritional values, (2) to calculate

the thermal properties of food components (including protein, fat, carbohydrate, fiber, and ash) by using the Choi and Okos equations [21]. They developed mathematical models for predicting the thermal properties of food components as functions of temperature in the range of -40 to 150°C. They also developed models for predicting the thermal properties of water and ice, and (3) to determine thermal properties of foods by using the parallel model given by Murakami and Okos [22]. The density of the sample was estimated by knowing  $\rho_i$  the density of the  $i$ th component and  $m_i$  the mass fraction of the  $i$ th component using the formula:

$$\rho = \frac{1}{\sum_{i=1}^n (m_i / \rho_i)} \quad [1]$$

where  $n$  is the number of different components. The thermal conductivity for a food material with  $n$  components was calculated from the weighted average of the thermal conductivity of the  $i$ th component  $k_i$ :

$$k = \sum_{i=1}^n v_i k_i \quad [2]$$

where  $v_i$  is the volume fraction of the  $i$ th component, which was calculated by

$$v_i = \frac{m_i / \rho_i}{\sum_{i=1}^n m_i / \rho_i} \quad [3]$$



The specific heat of food material with  $n$  components can be estimated by the following equation:

$$c_p = \sum_{i=1}^n m_i c_{pi} \quad [4]$$

where  $c_{pi}$  is the specific heat of the  $i$ th component in food matrix. In the case of frozen food, the thermal properties of the ice and liquid water mix are calculated first. In this study, the ratio of ice and water is 50:50 at a temperature of 0°C. The resulting thermal properties of ice or water mix are then combined successively with the thermal properties of each remaining food constituent to determine the thermal properties of the food product.

## Results and discussion

In this study, the results are shown as a function of temperature over frozen temperature range to thawed state and performed on three different materials. Therefore all properties are discussed in 2 periods: frozen state (-18 to 0°C) and thawed state (0 to 80°C). Measured values of dielectric constant and dielectric loss factor as function of temperature are shown in figure 2-3. Calculated properties from dielectric properties data bases, namely, power reflected, power transmitted, and dielectric loss tangent, are shown in table 1 and the penetration depth is displayed figure 4. Other important properties for analysis microwave heating process as thermal properties ( $k$ ,  $c$ ) are displayed in table 2. Finally, table 3 is shown predictive equations for the dielectric properties of frozen meals as a function of temperature between 0°C and 80°C at 2.45 GHz.

## Dielectric properties ( $\epsilon'$ and $\epsilon''$ )

Figure 2 and 3 show the changing of dielectric constant ( $\epsilon'$ ) and dielectric loss factor ( $\epsilon''$ ) of three Thai frozen foods between  $-18^{\circ}\text{C}$  and  $80^{\circ}\text{C}$  at 2.45 GHz, respectively. In the region of  $-10$  to  $0^{\circ}\text{C}$ ,  $\epsilon'$  and  $\epsilon''$  both value were significantly higher in this region than at measured temperatures of  $-18$  to  $-10^{\circ}\text{C}$  for all sample. From  $0$  to  $80^{\circ}\text{C}$ , dielectric properties ( $\epsilon'$  and  $\epsilon''$ ) linearly increased for basil fried chicken and congee with minced pork but linearly decreased for green curry with chicken. In addition, it was observed that  $\epsilon'$  of congee with minced pork was a higher value than  $\epsilon'$  of basil fried chicken but  $\epsilon''$  of congee with minced pork was lower values than  $\epsilon''$  of basil fried chicken. In other words, congee with minced pork highly stored electrical energy but low changed into heat. This is because effect of higher ice and water content of congee.

For basil fried chicken,  $\epsilon'$  increased from 4.45 (at  $-18^{\circ}\text{C}$ ) to 30.33 (at  $80^{\circ}\text{C}$ ) when there was the difference between the two temperatures about 26. While  $\epsilon''$  increased from 1.76 (at  $-18^{\circ}\text{C}$ ) to 19.24 (at  $80^{\circ}\text{C}$ ). It can be concluded that the high salt content from seasoning, including soup stock powder, soy sauce, fish sauce made  $\epsilon'$  and  $\epsilon''$  increased due to ion polarization. Finally, a green curry with chicken, the dielectric properties steadily increased with increasing temperature in frozen stage ( $\epsilon'=4.88$ ;  $\epsilon''=1.43$  at  $-18^{\circ}\text{C}$ ) but moderately decreased in unfrozen stage ( $\epsilon'=17.67$ ;  $\epsilon''=7.84$  at  $0^{\circ}\text{C}$  and  $\epsilon'=11.69$ ;  $\epsilon''=4.72$  at  $80^{\circ}\text{C}$ ). The reduction in the observed dielectric properties of the green curry with chicken may have been caused of high fat or lipid products, such as coconut milk, cooking oil [23]-[24].

## Penetration depth ( $d_p$ )

$d_p$  is an important parameter in characterizing temperature distribution in sample. It is related to the amount of power absorption passes through the product. In the other hand, the penetration depth is generally used to select approximate thickness of food inside packages to ensure a relatively uniform dielectric heating process. The  $d_p$  values were calculated using the following equation [25];

$$d_p = \frac{\lambda_0 \sqrt{2}}{2\pi} \left\{ \epsilon' \left[ \sqrt{1 + \left( \frac{\epsilon''}{\epsilon'} \right)^2} - 1 \right] \right\}^{-\frac{1}{2}} \quad [5]$$

where  $d_p$  is the penetration depth (m);  $\lambda_0$  is free space microwave wavelength (m) and equals to 0.122 m at 2.45 GHz. Figure 4 shows microwave penetration depths for three frozen meals at 2.45 GHz. At frozen temperature (-18°C), the penetration depth was fairly large (4.74 cm for basil fried chicken, 6.05 cm for green curry with chicken, and 33.58 cm for congee with minced pork at 2.45 GHz), then it dramatically decreased at thawed temperature (2.71 cm for basil fried chicken, 2.13 cm for green curry with chicken, and 6.18 cm for congee with minced pork at 2.45 GHz and 0°C). The results of the penetration depth calculated in this research agreed reasonably well with the previous published literatures. In general, penetration depths were reduced by about one-half when the temperature was increased from -20 to 100°C at frequencies from 300 to 3000 MHz [26].

The dramatically changing in penetration depth between the frozen and thawed states of sample directly influenced the heating uniformity and caused thermal runaway. This is because of the low penetration depth at higher temperature, edge heating may be severe. Thus, the thickness of food products should be considered in food design. For example, the thickness of food materials in radio-frequency pasteurization process should be not more two or three time the penetration depth [27]. For multi-compartment frozen foods, it is design to vary the thickness of the food in each compartment depending on the dielectric properties of the product in order to uniformity heating of foods in all compartments.

### **Percentage of microwave power ( $P_r$ , $P_t$ )**

Power reflected and power transmitted values for three frozen foods were shown in Table 1. The equations used for calculation these powers given by Buffer [25] are respectively defined as:

$$P_r = \left( \frac{\sqrt{\epsilon'} - 1}{\sqrt{\epsilon'} + 1} \right)^2 \quad [6]$$

$$P_t = 1 - P_r \quad [7]$$

Trends in the relationship between  $P_r$  and composition were largely in line with those reported for  $\epsilon'$  because the strong relationship between these values and measured of  $\epsilon'$  [20]. Over the range of -18 to 0°C,  $P_t$  was higher than  $P_r$ . While  $P_t$  and  $P_r$  values were no significant different at 0 to 80°C. This can explain the higher power reflected found for the sample with higher  $\epsilon'$  values.

## **Thermal conductivity (k)**

The temperature-dependent thermal conductivities of all samples are showed and listed in table 2. The k values of all samples calculated at 80°C were higher than those at 10 to 70°C. However, values at -10°C were significantly higher than values at 80°C. In other words, in the frozen temperature range, the thermal conductivity decreased with increasing temperature due to the decreasing of ice fraction. After then, in the thawed temperature range, the thermal conductivities did not change considerably. This trend was similarly reported in many previous researches [27], [28], [29], [30], [31], [32] . Basil fried chicken and green curry with chicken both have slightly lower thermal conductivity values than those of congee with minced pork due to low ice and water content.

The thermal conductivity difference between frozen and thawed materials will influence the temperature distribution in food during microwave heating process. The heating rate is lower at frozen state because the dielectric properties are low. Then, some part of frozen food is thawed, the heating rate increases due to higher dielectric loss factor. The low thermal conductivity of the thawed layer will delay the heat transfer between unfrozen and frozen materials. Therefore, these phenomena lead to hot spots in foods and results in greater non-uniform heating.

## **Specific heat capacity (c)**

The specific heat capacities of all meals as a function of temperature from -18 to 80°C are shown in table 2. All samples displayed the same trend. From -18 to -10°C, the c values increased

slightly from about 1.44 to 1.48  $\text{kJkg}^{-1}\text{C}^{-1}$  for basil fried chicken, from 1.51 to 1.55  $\text{kJkg}^{-1}\text{C}^{-1}$  for green curry with chicken, and from 1.93 to 1.97  $\text{kJkg}^{-1}\text{C}^{-1}$  for congee with minced pork. From -10 to 10°C, the specific heat capacities of the three samples increased sharply and then (10 to 80°C) increased slightly. The  $c$  values increased sharply represent the phase change from frozen to thawed state. After thawed state (0 to 80°C), the specific heat capacities of the three samples increased slowly until the temperature reached the second phase change of vaporization at around 100°C. This delay in rising temperature also affects to the non-uniformity of microwave thawing process.

The latent heat of fusion for basil fried chicken, green curry with chicken, and congee with minced pork was calculated as 201.4, 224.8, 295.3  $\text{kJkg}^{-1}$ , respectively. These properties are critical input parameters for a microwave heat transfer model, which can be used by food scientist in developing new product that minimize non uniform heating during heating in a domestic microwave oven.

## Regression analysis

Polynomial equations were developed for dielectric properties ( $\epsilon'$ ,  $\epsilon''$ ) at 2.45 GHz over temperature range 0 to 80°C by using regression calculations. Three frozen meals also achieved by using this method. The results are listed in table 3. The regression equations and all the predictors in the equations had a significance of  $P < 0.001$  and the adjusted coefficients of determination,  $R^2$  values, were used to indicate how well data fit a statistical model. From the table, significant polynomial relationships were found for all combinations and can be used to

predict the raw dielectric properties data for frozen foods (including basil fried chicken, green curry with chicken, and congee with minced pork) and incorporated into computer simulation model needed to study the coupled dielectric heating and heat transfer process.

## Conclusion

The temperature-dependent dielectric and thermal properties of the three frozen foods were studied at frequency 2.45 GHz and temperature from -18 to 80°C. In the frozen temperature range, dielectric and thermal properties both rapidly changed with increasing temperature. And then, at thawed temperature range, those properties slightly varied with temperature. For these samples, the penetration depths at 2.45 GHz were about five times decreased for temperature between -18 and 80°C. The regression equations for predicting dielectric constant and dielectric loss factor at various temperatures of the three frozen foods were developed. These prediction equations are fit well with experimental data. This work shows an important input parameters for a microwave heat transfer model. However, further work and measured thermal properties will need to be studied to confirm this.

## Acknowledgements

The authors gratefully acknowledge the Thailand Research Fund under the project no. TRG5780223 and the National Research Universities Project of the Higher Education Commission for supporting this research.

## References

- [1] O. Than, "Frozen food in Thailand for 2015," Thansettakij News, Bangkok, 27 January 2012.
- [2] A. Poll, "Consumer behavior on ready to eat frozen meals in Bangkok," ABAC Poll Thailand, Bangkok, 2012.
- [3] M. K. Ahlgren, I. Gustafsson and G. Hall, "The impact of the meal situation on the consumption of ready meals," *International Journal of Consumer Studies*, vol. 29, no. 6, pp. 485-492, November 2005.
- [4] J. Ahmed, H. Ramaswamy and V. Raghavan, "Dielectric properties of Indian Basmati rice flour slurry," *Journal of Food Engineering*, vol. 80, no. 4, p. 1125–1133, June 2007.
- [5] R. Calay, M. Newborough, D. Probert and P. Calay, "Predictive equations for the dielectric properties of foods," *International Journal of Food Science & Technology*, vol. 29, no. 6, p. 699–713, December 1994.
- [6] G. Ayappa, H. Davis, E. Davis and J. Gordon, "Analysis of microwave heating of materials with temperature-dependent properties," *AIChE Journal*, vol. 37, no. 3, pp. 313-322, March 1991.
- [7] T. Basak and K. Ayappa, "Influence of internal convection during microwave thawing of cylinders," *AIChE Journal*, vol. 47, no. 4, p. 835–850, April 2001 .




- [8] W. Guo, X. Zhu, S. Nelson, R. Yue, H. Liu and Y. Liu, "Maturity effects on dielectric properties of apples from 10 to 4500 MHz," *LWT - Food Science and Technology*, vol. 44, no. 1, p. 224–230, January 2011.
- [9] V. Tran, S. Stuchly and A. Kraszewski, "Dielectric Properties of Selected Vegetables and Fruits 0.1-10.0 GHz," *Journal of Microwave Power and Electromagnetic Energy*, vol. 19, no. 4, pp. 251-258, 1984.
- [10] H. Zhuang, S. Nelson, S. Trabelsi and E. Savage, "Dielectric properties of uncooked chicken breast muscles from ten to one thousand eight hundred megahertz," *Poult Sci.*, vol. 86, no. 11, pp. 2433-2440, November 2007.
- [11] Y. Wang, J. Tang, B. Rasco, F. Kong and S. Wang, "Dielectric properties of salmon fillets as a function of temperature and composition," *Journal of Food Engineering*, vol. 87, no. 2, p. 236–246, July 2008.
- [12] S. Nelson and P. Bartley, "Measuring frequency and temperature dependent dielectric properties of food materials," *Transactions of the ASAE*, vol. 43, no. 6, pp. 1733-1736, 2000.
- [13] S. Nelson and P. Bartley, "Frequency and temperature dependence of the dielectric properties of food materials," *Transactions of the ASAE*, vol. 45, no. 4, p. 1223–1227, 2002.
- [14] A. Garcia, J. Torres, M. Blas, A. Francisco and R. Illanes, "Dielectric characteristics of grape juice and wine," *Biosystems Engineering*, vol. 88, no. 3, p. 343–349, July 2004.

- [15] J. Wang, J. Tang, Y. Wang and B. Swanson, "Dielectric properties of egg whites and whole eggs as influenced by thermal treatments," *LWT - Food Science and Technology*, vol. 42, no. 7, p. 1204–1212, September 2009.
- [16] Y. Wang, T. Wig, J. Tang and L. Hallberg, "Dielectric properties of foods relevant to RF and microwave pasteurization and sterilization," *Journal of Food Engineering*, vol. 57, no. 3, p. 257–268, May 2003.
- [17] L. Zhang, J. Lyng, N. Brunton, D. Morgan and B. McKenna, "Dielectric and thermophysical properties of meat batters over a temperature range of 5–85 °C," *Meat Science*, vol. 68, no. 2, p. 173–184, October 2004.
- [18] J. Lyng, L. Zhang and N. Brunton, "A survey of the dielectric properties of meats and ingredients used in meat product manufacture," *Meat Science*, vol. 69, no. 4, p. 589–602, April 2005.
- [19] R. Meléndez, M. Morales, J. Cervantes and A. Chávez, "Dielectric Properties of Beans at Different Temperatures and Moisture Content in the Microwave Range," *International Journal of Food Properties*, vol. 19, no. 3, pp. 564-577, March 2016.
- [20] M. Ngadi, S. Dev, V. Raghavan and S. Kazemi, "Dielectric Properties of Pork Muscle," *International Journal of Food Properties*, vol. 18, no. 1, pp. 12-20, January 2015.
- [21] Y. Choi and M. Okos, "Effects of temperature and composition on the thermal properties of foods," *Korean Journal of Food Science and Technology*, vol. 18, no. 5, pp. 357-363, January 1986.

- [22] E. G. Murakami and M. R. Okos, "Measurement and Prediction of Thermal Properties of Foods," *Food Properties and Computer-Aided Engineering of Food Processing Systems*, vol. 168, pp. 3-48, 1989.
- [23] S. Ryyänen, "The electromagnetic properties of food materials: a review of the basic principles," *Journal of Food Engineering*, vol. 26, no. 4, p. 409–429, 1995.
- [24] J. Lyng, M. Scully, B. McKenna, A. Hunter and G. Molloy, "The influence of compositional changes in beef burgers on their temperatures and their thermal and dielectric properties during microwave beating," *Journal of Muscle Foods*, vol. 13, no. 2, pp. 123-142, 2002.
- [25] C. Buffler, "Dielectric properties of foods and microwave materials," in *In Microwave Cooking and processing*, New York, Van Nostrand Reinhold, 1993, pp. 46-49.
- [26] J. Chen, K. Pitchai, S. Birla, R. Gonzalez, D. Jones and J. Subbiah, "Temperature dependent dielectric and thermal properties of whey protein gel and mashed potato," *Transactions of the ASABE*, vol. 56, no. 6, pp. 1457-1467, 2013.
- [27] R. Schiffmann, "Microwave and Dielectric Drying," in *Handbook of Industrial Drying, Third Edition Edited by Arun S. Mujumdar*, New York, Marcel Decker, Inc., 1995, pp. 286-352.
- [28] O. Miyawaki and R. Pongsawatmanit, "Mathematical analysis of the effective thermal conductivity of food materials in the frozen state," *Bioscience, Biotechnology, and Biochemistry*, vol. 58, no. 7, pp. 1222-1225, 1994.


- [29] T. Tuladhar, W. Paterson and D. Wilson, "Thermal conductivity of whey protein films undergoing swelling: Measurement by dynamic gauging," *Food and Bioprocess Processing*, vol. 80, no. 4, pp. 332-339, December 2002.
- [30] J. Willix, S. Lovatt and N. Amos, "Additional thermal conductivity values of foods measured by a guarded hot plate," *Journal of Food Engineering*, vol. 37, no. 2, p. 159-174, August 1998.
- [31] O. Fasina, B. Farkas and H. Fleming, "Thermal and dielectric properties of sweetpotato puree," *International Journal of Food Properties*, vol. 6, no. 3, pp. 461-472, 2003.
- [32] S. Kumcuoglu, S. Tavman, P. Nesvadba and I. Tavman, "Thermal conductivity measurements of a traditional fermented dough in the frozen state," *Journal of Food Engineering*, vol. 78, no. 3, p. 1079-1082, February 2007.

Figure 1 Portable dielectric measurement (Network Analyzer)

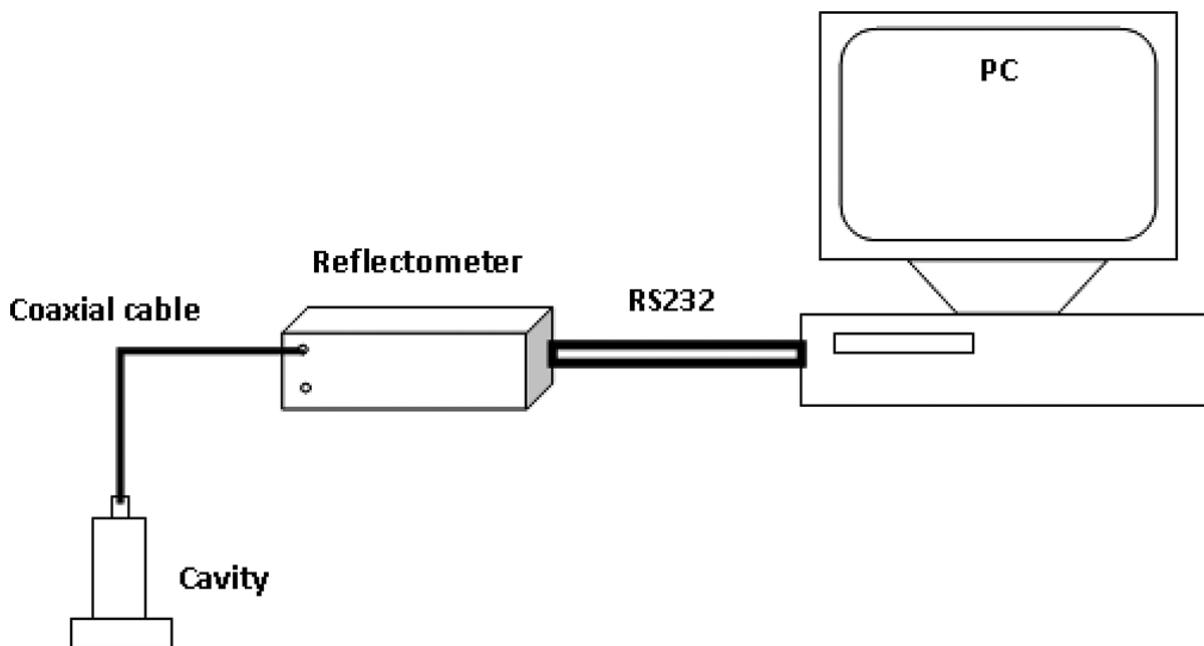

Accepted Manuscript


Figure 2 Change of dielectric constant of frozen meals as a function of temperature at 2.45 GHz

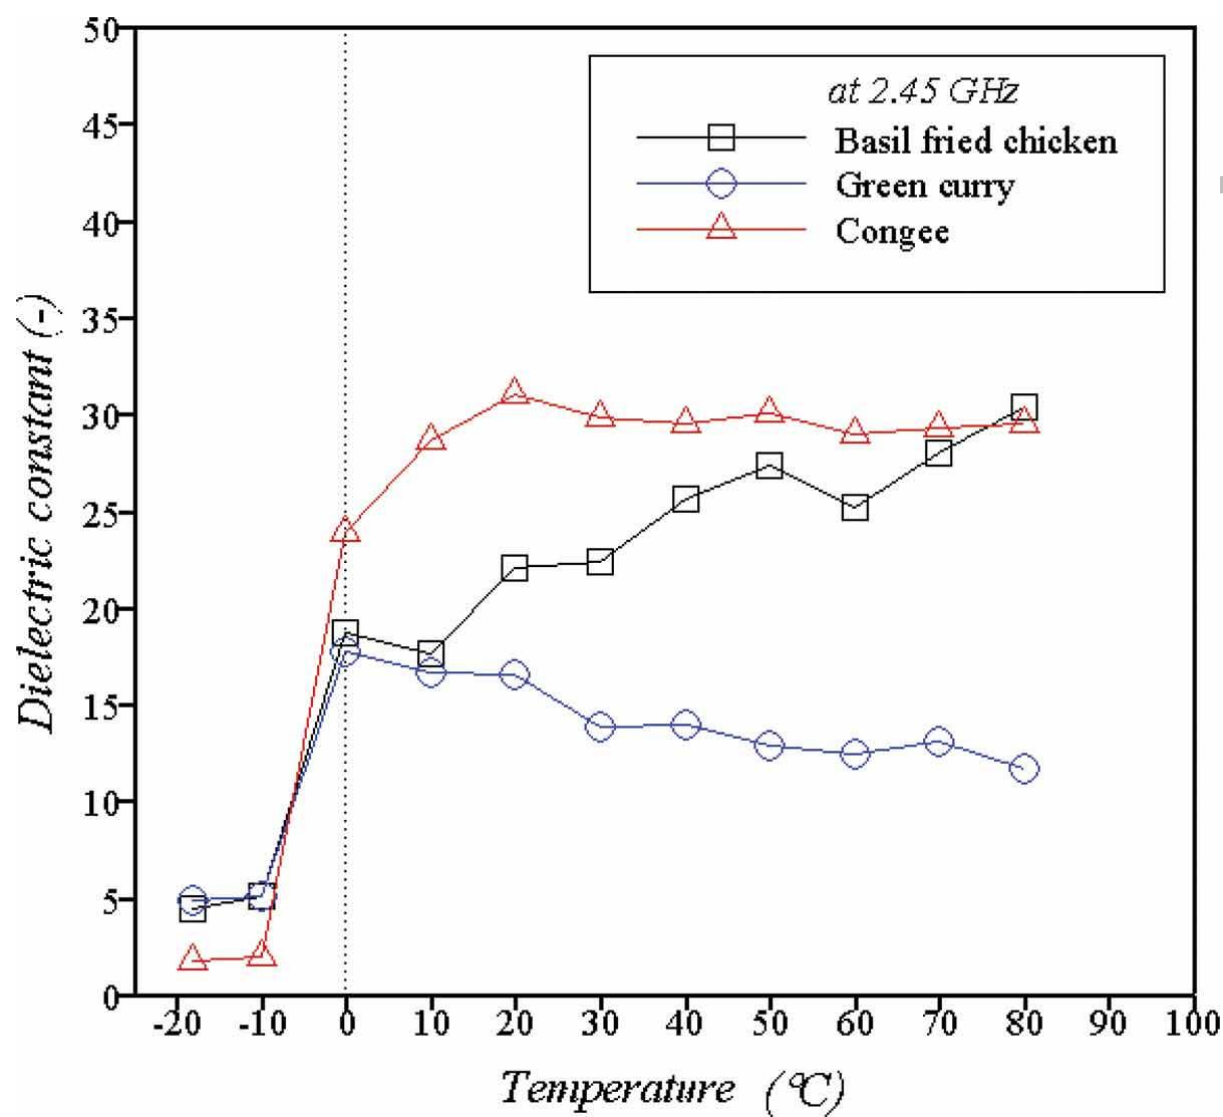

ACC


Figure 3 Change of dielectric loss factor of frozen meals as a function of temperature at 2.45

GHz

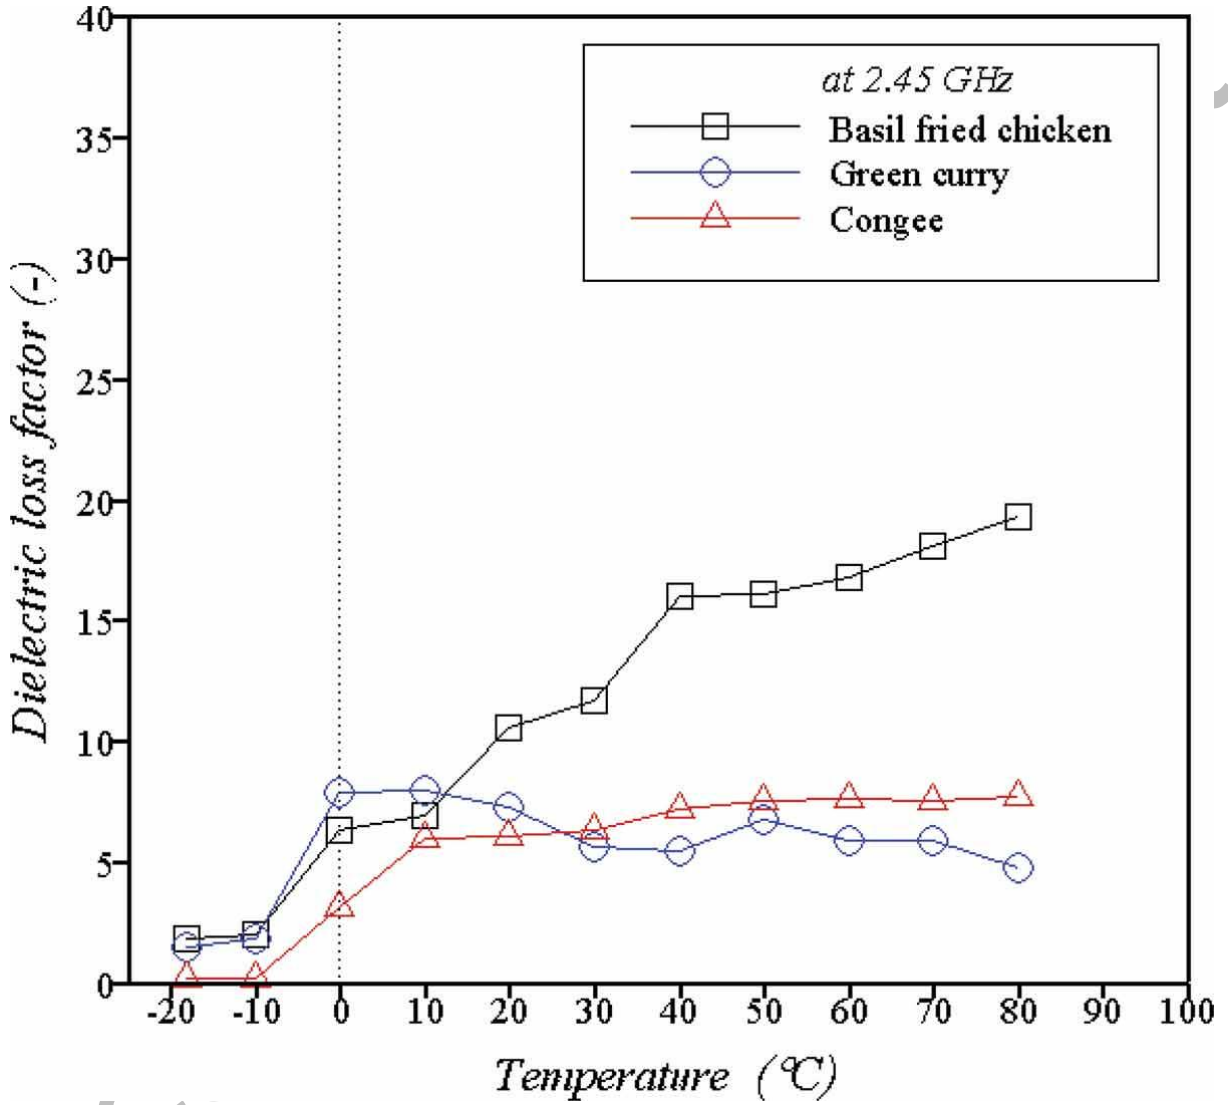

AC

Figure 4 Penetration depths of frozen meals as a function of temperature at 2.45 GHz

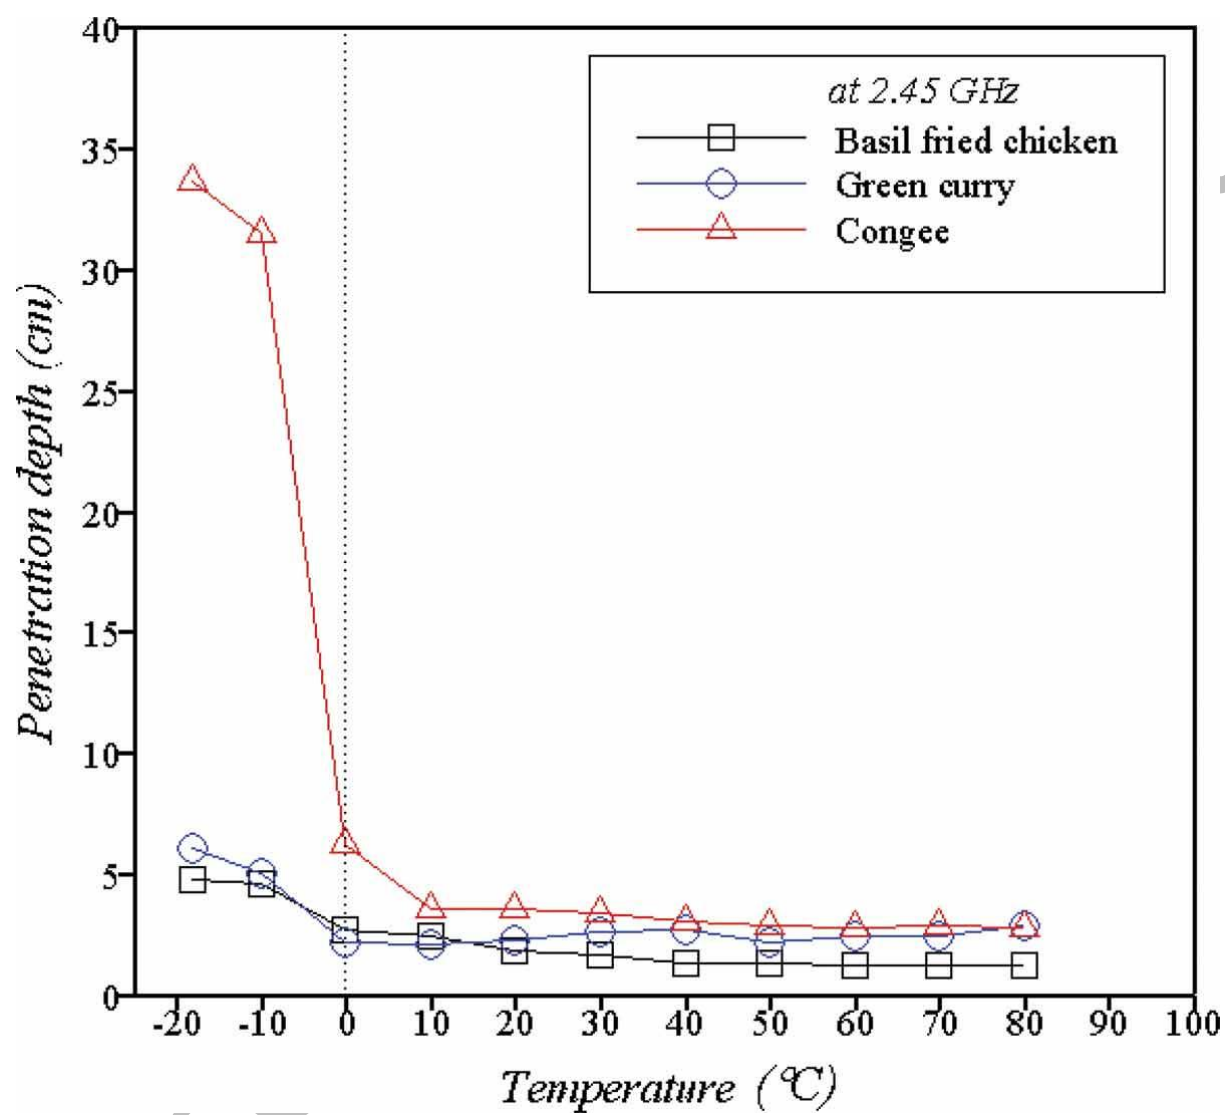

ACC



Table 1 The properties and parameter of frozen meals at 2.45 GHz.

sample	T (°C)	tan $\delta$	Power reflected,	Power transmitted,
			P <sub>r</sub> [%]	P <sub>t</sub> [%]
Basil fried chicken	-18	0.40	0.127	0.873
	-10	0.38	0.148	0.852
	0	0.34	0.389	0.611
	10	0.39	0.378	0.622
	20	0.48	0.421	0.579
	30	0.52	0.424	0.576
	40	0.62	0.449	0.551
	50	0.59	0.460	0.540
	60	0.67	0.446	0.554

sample	T (°C)	tan $\delta$	Power reflected,	Power transmitted,
			P <sub>r</sub> [%]	P <sub>t</sub> [%]
	70	0.64	0.465	0.535
	80	0.63	0.480	0.520
	-18	0.29	0.142	0.858
	-10	0.35	0.148	0.852
	0	0.44	0.379	0.621
Green curry with chicken	10	0.48	0.367	0.633
	20	0.44	0.366	0.634
	30	0.41	0.332	0.668
	40	0.39	0.333	0.667

sample	T (°C)	tan $\delta$	Power reflected,	Power transmitted,
			P <sub>r</sub> [%]	P <sub>t</sub> [%]
	50	0.53	0.317	0.683
	60	0.47	0.311	0.689
	70	0.45	0.321	0.679
	80	0.40	0.300	0.700
	-18	0.09	0.017	0.983
	-10	0.09	0.025	0.975
	0	0.13	0.435	0.565
Congee with minced pork	10	0.21	0.469	0.531
	20	0.20	0.483	0.517
	30	0.21	0.477	0.523

---

sample	T (°C)	tan $\delta$	Power reflected,	Power transmitted,
			P <sub>r</sub> [%]	P <sub>t</sub> [%]
	40	0.24	0.475	0.525
	50	0.25	0.478	0.522
	60	0.26	0.471	0.529
	70	0.26	0.474	0.526
	80	0.26	0.475	0.525

---

Accepted Manuscript

Table 2 Thermal properties of frozen meals at 2.45 GHz.

sample	T (°C)	Thermal conductivity	Specific heat	Density
		[W/(m.°C)]	[kJ/(kg.°C)]	[kg/m <sup>3</sup> ]
Basil fried chicken	-18	1.45	1.44	726.56
	-10	1.41	1.48	725.43
	0	0.87	2.14	748.22
	10	0.38	2.76	771.59
	20	0.39	2.76	770.30
	30	0.40	2.77	768.56
	40	0.41	2.77	766.36
	50	0.42	2.77	763.71
	60	0.42	2.78	760.61

sample	T (°C)	Thermal conductivity	Specific heat	Density
		[W/(m.°C)]	[kJ/(kg.°C)]	[kg/m <sup>3</sup> ]
	70	0.43	2.78	757.06
	80	0.43	2.79	753.05
	-18	1.61	1.51	746.18
	-10	1.56	1.55	745.10
	0	0.96	2.29	770.76
Green curry with chicken	10	0.42	2.98	797.07
	20	0.43	2.98	795.86
	30	0.44	2.99	794.14
	40	0.45	2.99	791.91

sample	T (°C)	Thermal conductivity	Specific heat	Density
		[W/(m.°C)]	[kJ/(kg.°C)]	[kg/m <sup>3</sup> ]
	50	0.45	2.99	789.18
	60	0.46	3.00	785.95
	70	0.47	3.00	782.20
	80	0.47	3.01	777.95
	-18	2.11	1.93	978.75
	-10	2.05	1.97	977.47
Congee with minced pork	0	1.26	2.94	1011.35
	10	0.54	3.86	1046.08
	20	0.56	3.86	1044.66
	30	0.57	3.86	1042.58

sample	T (°C)	Thermal conductivity [W/(m.°C)]	Specific heat [kJ/(kg.°C)]	Density [kg/m <sup>3</sup> ]
	40	0.58	3.87	1039.83
	50	0.60	3.87	1036.42
	60	0.61	3.88	1032.34
	70	0.61	3.88	1027.60

Accepted Manuscript



Table 3 Predictive equations for the dielectric properties of frozen meals as a function of temperature between 0°C and 80°C at 2.45 GHz.

Sample	Regression equation			$R^2$
	$y = aT^2 + bT + c$			
Dielectric constant, $\epsilon'$	$a \times 10^2 (^\circ C^{-2})$	$b (^\circ C^{-1})$	$c (-)$	
Basil fried chicken	-4.6	1.948	15.84	0.905
Green curry with chicken	7.4	-1.466	19.25	0.930
Congee with minced pork	-29.9	3.133	22.41	0.704
Dielectric loss factor, $\epsilon''$				

---

Basil fried chicken	-13.2	3.023	2.576	0.968
Green curry with chicken	2.6	-0.600	8.525	0.701
Congee with minced pork	-12.1	1.626	2.196	0.897

---

Accepted Manuscript